


MICRO-FILTRAZIONE A TAMBURO PER CANALI IN CEMENTO serie MFTC DRUM MICRO-FILTRATION FOR CHANNELS IN CONCRETE series MFTC

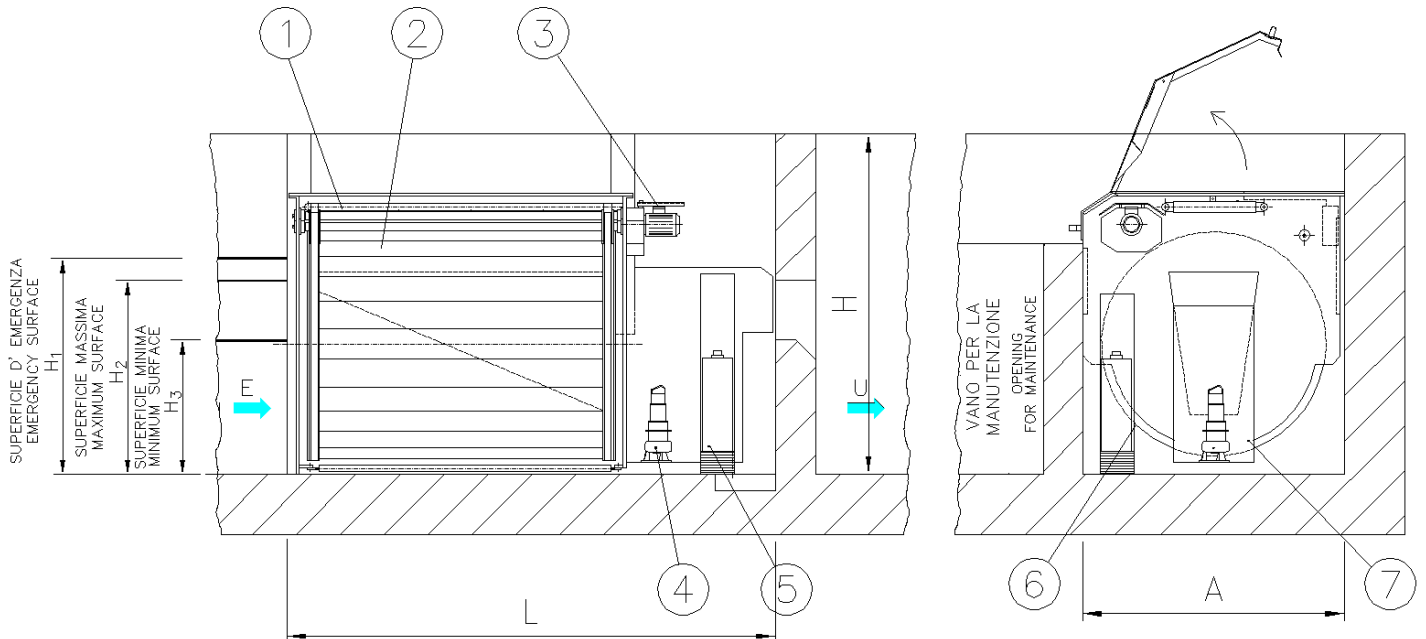

- | | |
|---|---|
| <p>1. Tubo porta ugelli
Pipe with nozzles</p> <p>2. Tamburo filtrante
Filtering drum</p> <p>3. Motoriduttore
Gearmotor</p> <p>4. Pompa Fanghi (optional)
Sludge Pump (optional)</p> | <p>5. Pompa lavaggio tamburo
Drum washing pump</p> <p>6. Cestello filtrante
Filtering gasket</p> <p>7. Vasca raccolta fanghi
Sludges collection tank</p> |
|---|---|

Modello Type	MFTC 5/5	MFTC 5/10	MFTC 10/10	MFTC 10/20	MFTC 10/25	MFTV 15/30
A [mm]	720	900	1115	1315	1515	1915
L [mm]	1050	1600	2200	2740	3640	4250
H [mm]	850	1030	1250	1500	1900	2200
H1 [mm]	520	585	780	960	1150	1390
H2 [mm]	497	565	760	940	1130	1250
H3 [mm]	397	475	645	790	1030	1080
Potenza installata [kw] Installed power	0,25	0,25	0,37	0,37	0,55	0,75
Portata Flow rate [m ³ /h]	15 - 36	25 - 83	50 - 144	96 - 288	115 - 360	210 - 560

Nota: Su richiesta l'apertura del coperchio del filtro può essere installata sul lato sinistro della macchina.

Note: On request the opening of the filter cover can be installed on the left side of the machine.